




**EVENT™**

---


by Gabriel

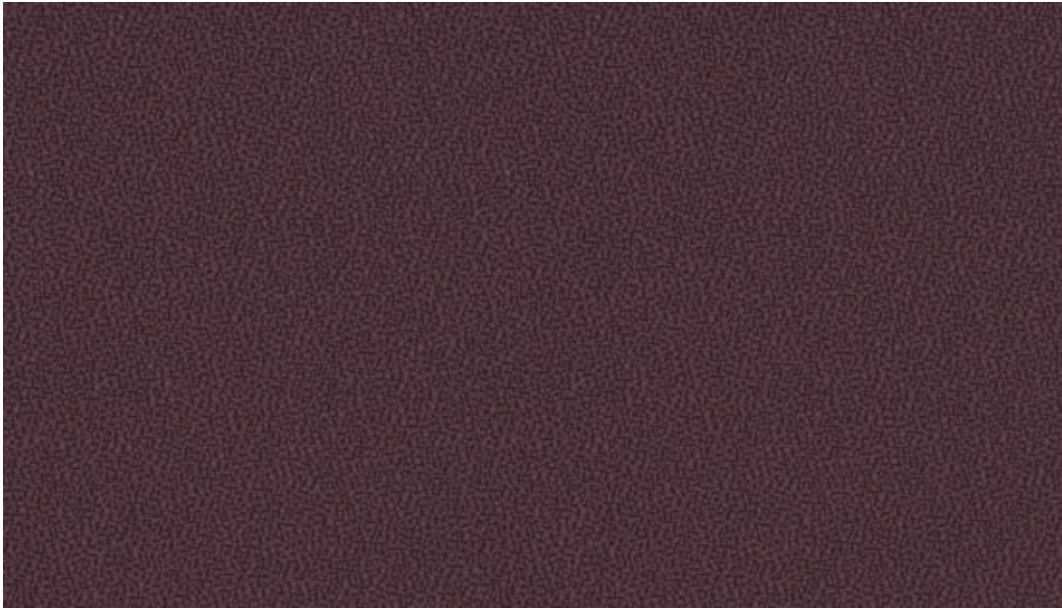

65017



60000



62013




63013



61032



64032



60022




61031




64031




60023



64030



60999




65017



67019




66035



67018



66038



66034



68033



65018



66036



68032



66033



66037



67020


















# EVENT™

---

Event specifications: [www.gabriel.dk](http://www.gabriel.dk)

Please be aware that the PDF colour shades can appear different from the real fabric colours.  
We advise you to request actual fabric samples before ordering.

# EVENT™

Design no.	8598	
Fields of application	contract	
Material	polyester	100 %
Weight	420 g/lm · (13.55 oz/lin.yd.)	
Width	140 cm · (55")	
Abrasion resistance	rubs · EN ISO 12947-2 (Martindale)	100,000
Pilling	scale 1-5, max. 5 · EN ISO 12945-2	4-5
Colour fastness to light	scale 1-8, max. 8 · EN ISO 105 - B02	5-7
Colour fastness to rubbing	scale 1-5, max. 5 · EN ISO 105x12 (wet/dry)	4-5/4-5
Maintenance	dry cleaning: P(W)	
	     Shrinkage max. 0,5%	
	     Shrinkage max. 1,5%	
Flammability	EN 1021 1&2 · Calif. Bull. 117-E class 1 · AM18 – NF D 60-013 · CA TB 117-2013 Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used.	
US ACT	<ul style="list-style-type: none"> <li> AATCC 16 Light fastness</li> <li> AATCC 8 or 116 wet/dry crocking</li> <li> California Bulletin CAL 117-E Class 1</li> <li> CA TB 117-2013</li> <li> ASTM D4157-07 Wyz Abrasion (Heavy Duty Upholstery)</li> <li> ASTM D3511 Pilling</li> <li> ASTM E 84</li> </ul>	<ul style="list-style-type: none"> <li>pass</li> <li>pass</li> <li>pass</li> <li>pass</li> <li>pass</li> <li>pass</li> <li>pass</li> </ul>
Design/Colours	Inger Møsholt Nielsen	
Subject to changes and colour differences		

