



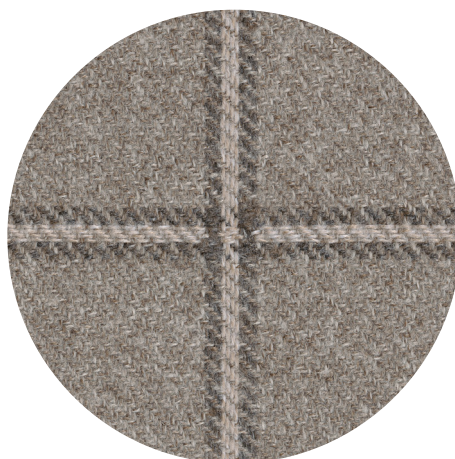


DOWNTOWN


by Gabriel

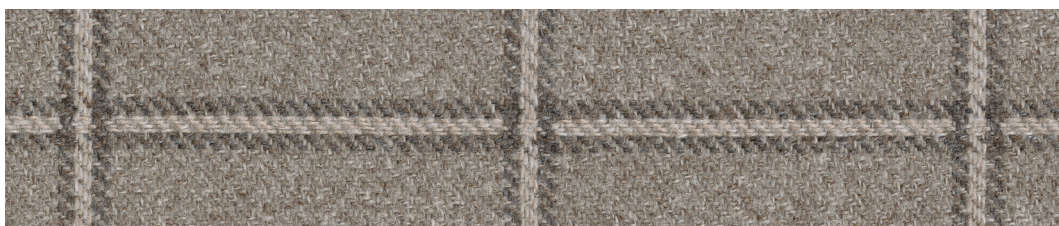


1103

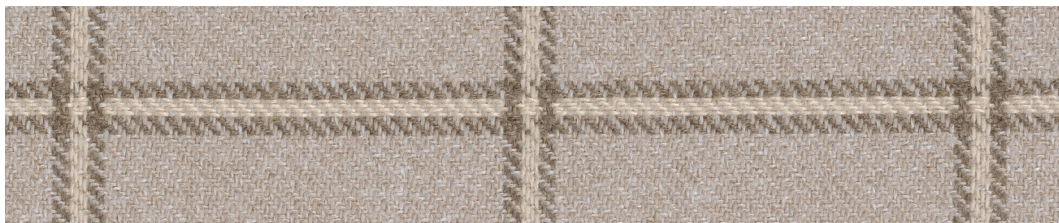


1104

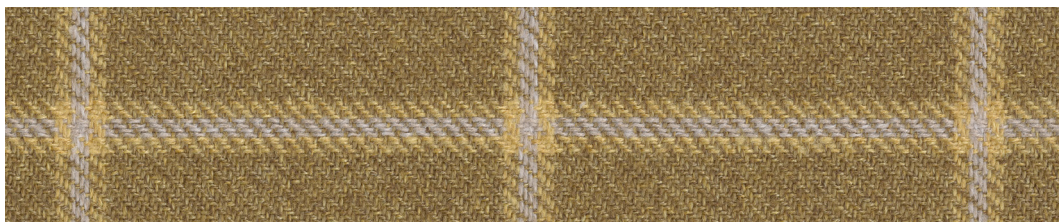


1105

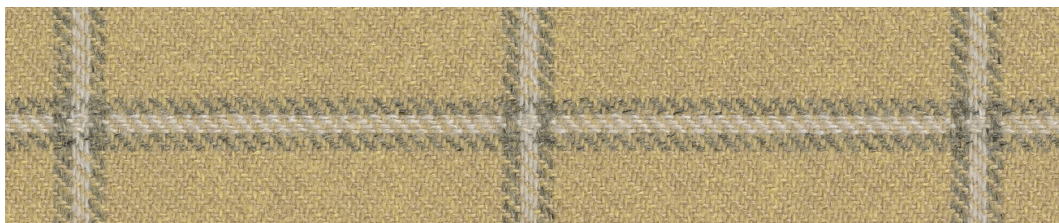


1106

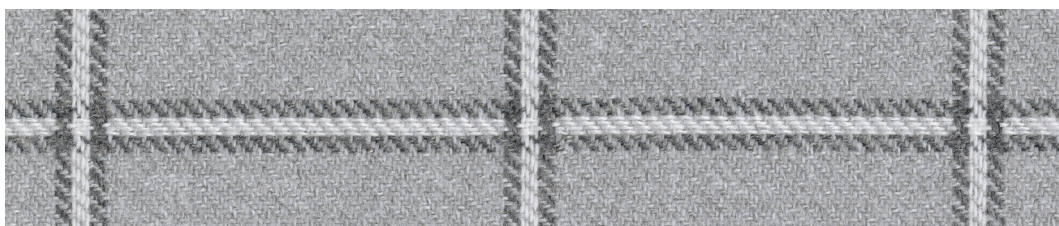


1102

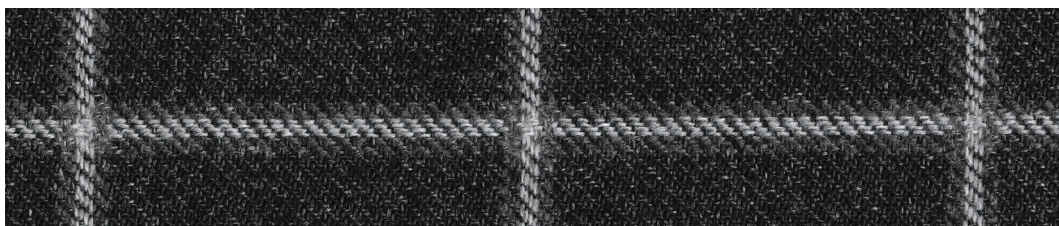


1101

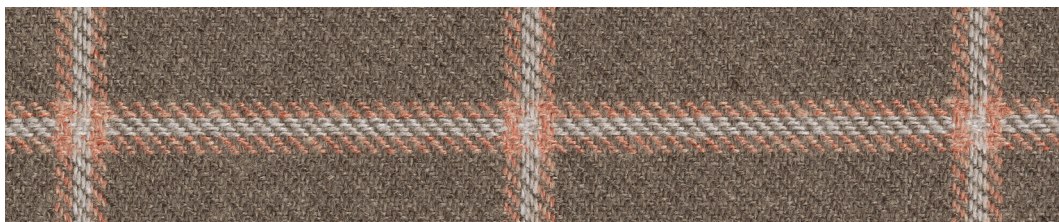

1109

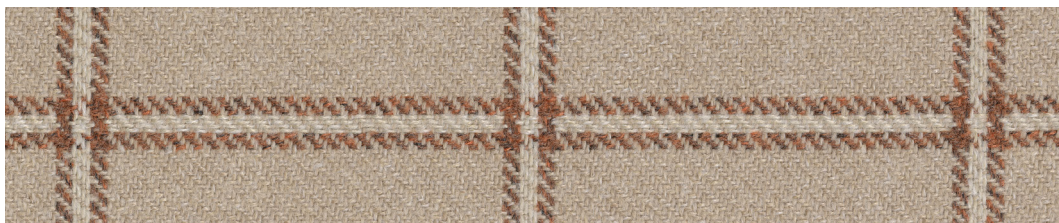

1108

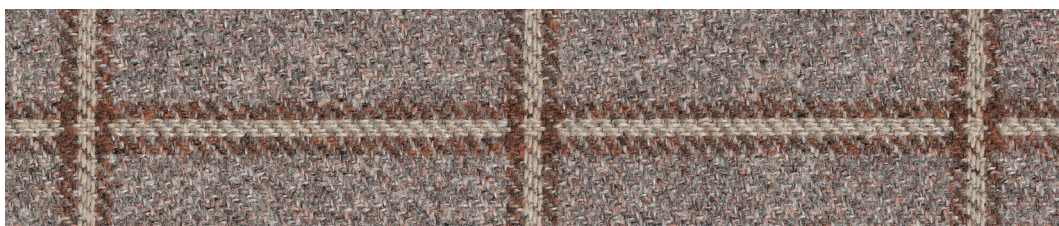


1110




1107



1103

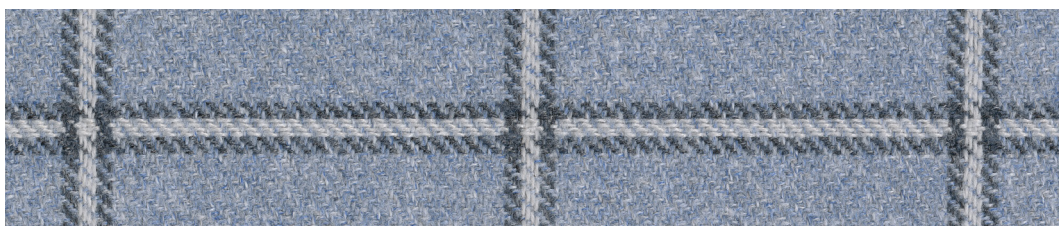

1111

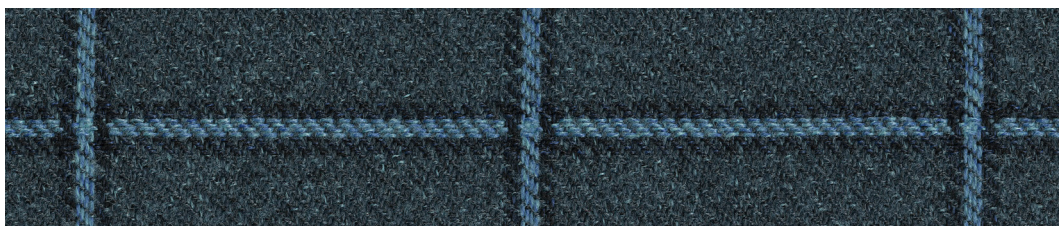

1112

DOWNTOWN

Specifications: www.gabrielfabrics.com

Please be aware that the PDF colour shades can appear different from the real fabric colours.
We advise you to request actual fabric samples before ordering.

DOWNTOWN

COLOUR 2379-01105

Please be aware that the colour shades can appear different from the real fabric colours. We advise you to request actual fabric samples before ordering.



COLOUR SCALE

Design no. 2379 Downtown (140 cm/55") is available in 12 colours



Downtown is a refined and precise pattern fabric defined by its smaller (65 mm), more structured grid and subtle Scandinavian sensibility. It blends graphic discipline with understated elegance; adding texture, rhythm, and depth to interiors. Downtown is a multi-use fabric designed to bring clarity and cohesion to hospitality, commercial, and workplace spaces. Design and colours by Cenk Kivrikoglu and Gensler, serving as product design consultant.

100% recyclable polyester

Meets Möbelfakta requirements



PRODUCT SPECIFICATIONS

CHARACTERISTICS

Design no.

2379 — Downtown

Application

Upholstery

Panel

Screen

Composition

100% Post-consumer recycled polyester


Weight

475 g/lm — 15.32 oz/lin.yd

Width

140 cm — 55 inches

ENVIRONMENT



PERFORMANCE

Abrasion

100,000 — rubs martindale BS EN 14465 (ISO 12947-2)

100,000 — double rubs wyzenbeek (ASTM D4157) (heavy duty upholstery)

Pilling

4-5 — scale 1-5, max. 5 (EN ISO 12945-2)

Light fastness

7-8 — scale 1-8, max. 8 (EN ISO 105-B02)

Rubbing fastness dry/wet

4-5/4-5 — scale 1-5, max. 5 (EN ISO 105x12)

Flammability

BS EN 1021-1 Cigarette

BS EN 1021-2 Match

DIN EN 13501-1 B-s1,d0

Class Uno UNI 9175 Class 1 | EMME

CA TB 117-2013

Meets Möbelfakta requirements

VOC emission

Ansi/Bifma VOC test M7.1

ASTM E 84 Class 1(Unadhered).

BS 5852 Part 1 0,1 Cigarette & Match, The Furniture and Furnishing Regulations 1988(option flame retardant).

BS 5852 Crib 5 (option flame retardant)

Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemicals.

US ACT pass

 CATB 117-2013

 ASTM E 84 Class 1(Unadhered).

 ASTM D4157-07 Wyz abrasion (heavy duty) 100k

 ASTM D3511 Pilling

 AATCC 16 Light fastness

 AATCC 8 or 116 Dry/wet crocking

Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

CERTIFICATES

ACOUSTIC TEST AIR FLOW RESISTANCE

Test	Condition	No.	Date	Download
EN 29053 & ISO 9053-1 (airflow resistance)		B104146/71	24 Apr 2025	PDF

ABRASION RESISTANCE

Test	Condition	No.	Date	Download
BS EN ISO 12947-2/14465	In accordance with EN 14465	28515733	28 Mar 2025	PDF
ASTM D4157-07 Wyz abrasion (heavy duty) 100k		25-000836	03 Apr 2025	PDF

PILLING

Test	Condition	No.	Date	Download
BS EN ISO 12945-2		28515733	28 Mar 2025	PDF

ACOUSTIC TEST AIR FLOW RESISTANCE

ASTM D3511 Pilling	25-000836	03 Apr 2025	PDF
--------------------	-----------	-------------	---------------------

COLOUR FASTNESS TO LIGHT

Test	Condition	No.	Date	Download
BS EN ISO 105 B02 Method 2		2025AN0970	17 Apr 2025	PDF
AATCC 16 Light fastness		2025AN0970	17 Apr 2025	PDF

DRY AND WET RUBBING/CROCKING

Test	Condition	No.	Date	Download
BS EN ISO 105-X12 Rubbing dry/wet		2025AN0933	29 May 2025	PDF
AATCC 8 or 116 Dry/wet crocking		2025AN0933	29 May 2025	PDF

SEAM SLIPPAGE

Test	Condition	No.	Date	Download
BS EN ISO 13936-2		28515733	28 Mar 2025	PDF
ASTM D4034 Yarn slippage at a sewn seam		25-000837	08 Apr 2025	PDF

WASH STABILITY

Test	Condition	No.	Date	Download
BS EN ISO 6330 6M 60 C PC Flat dry	Dimensional Stability to Washing at 60dg.C	28515755	29 Apr 2025	PDF

FLAMMABILITY

Test	Condition	No.	Date	Download
BS EN 1021-1 Cigarette	20-22 kg/m3 non-fire retardant polyurethane foam	23/62947/03/25	27 Mar 2025	PDF
BS EN 1021-2 Match	35 kg/m3 CMHR foam	23/62947/03/25	27 Mar 2025	PDF
DIN EN 13501-1 B-s1,d0	Unadhered	25AN0998	22 Apr 2025	PDF

ACOUSTIC TEST AIR FLOW RESISTANCE

Class Uno UNI 9175 Class 1 I EMME	26,5 kg/m3 polyurethane foam	389401/1	10 Apr 2025	PDF
CA TB 117-2013		25-000837	08 Apr 2025	PDF
ASTM E 84 Class 1(Unadhered)	Unadhered	25-000837	28 Apr 2025	PDF

FLAMMABILITY WITH FLAMERETARDANT TREATMENT

Test	Condition	No.	Date	Download
BS 5852 Part 1 0,1 Cigarette & Match, The Furniture and Furnishing Regulations 1988(option flame retardant)	20-22 kg/m3 non-fire retardant polyurethane foam	23/64092/08/25	10 Sep 2025	PDF
BS 5852 Crib 5 (option flame retardant)	35 kg/m3 CMHR foam	23/63342/07/25	16 Jul 2025	PDF

BREAKING FORCE

Test	Condition	No.	Date	Download
ASTM D5034 Breaking force		25-000837	08 Apr 2025	PDF

RESISTANCE TO BLEACH CLEANING

Test	Condition	No.	Date	Download
Internal test according BIFMA HCF 8.1 and ACT Method 1	1:10 Sodium Hypochlorite 5,25-6,25%		23 May 2025	PDF

MATERIAL SAFETY DATA SHEET

Test	Condition	No.	Date	Download
Material Safety Data Sheet			01 Apr 2025	PDF

VOC EMISSION

Test	Condition	No.	Date	Download
Ansi/Bifma VOC test M7.1		392-2025-00484401	09 Oct 2025	PDF

CARE & MAINTENANCE

Wash or dry cleaning P(W).

Downtown is made of polyester which is a material suited for environments with special requirements for cleaning.

Click here for guidance relating to disinfection. [Link to Stain Guide...](#)



60°C shrinkage max 2.0%
